

7MBR50XMA120-50

IGBT Modules

Power Module(X series)
1200V / 50A / PIM


■ Features

- Low $V_{CE(sat)}$
- Compact Package
- P.C.Board Mount Module
- Converter Diode Bridge Dynamic Brake Circuit
- RoHS compliant Product


■ Applications

- Inverter for Motor Drive
- AC and DC Servo Drive Amplifier
- Uninterrupted Power Supply


■ Typical appearance

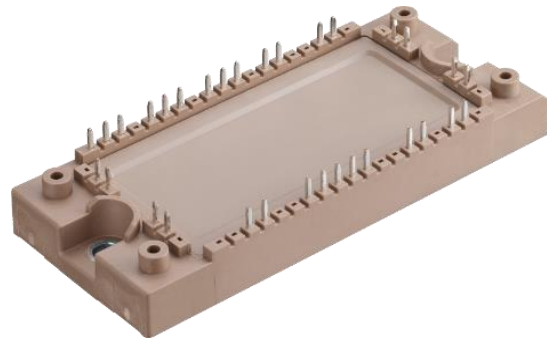

■ Outline drawing (Unit : mm)

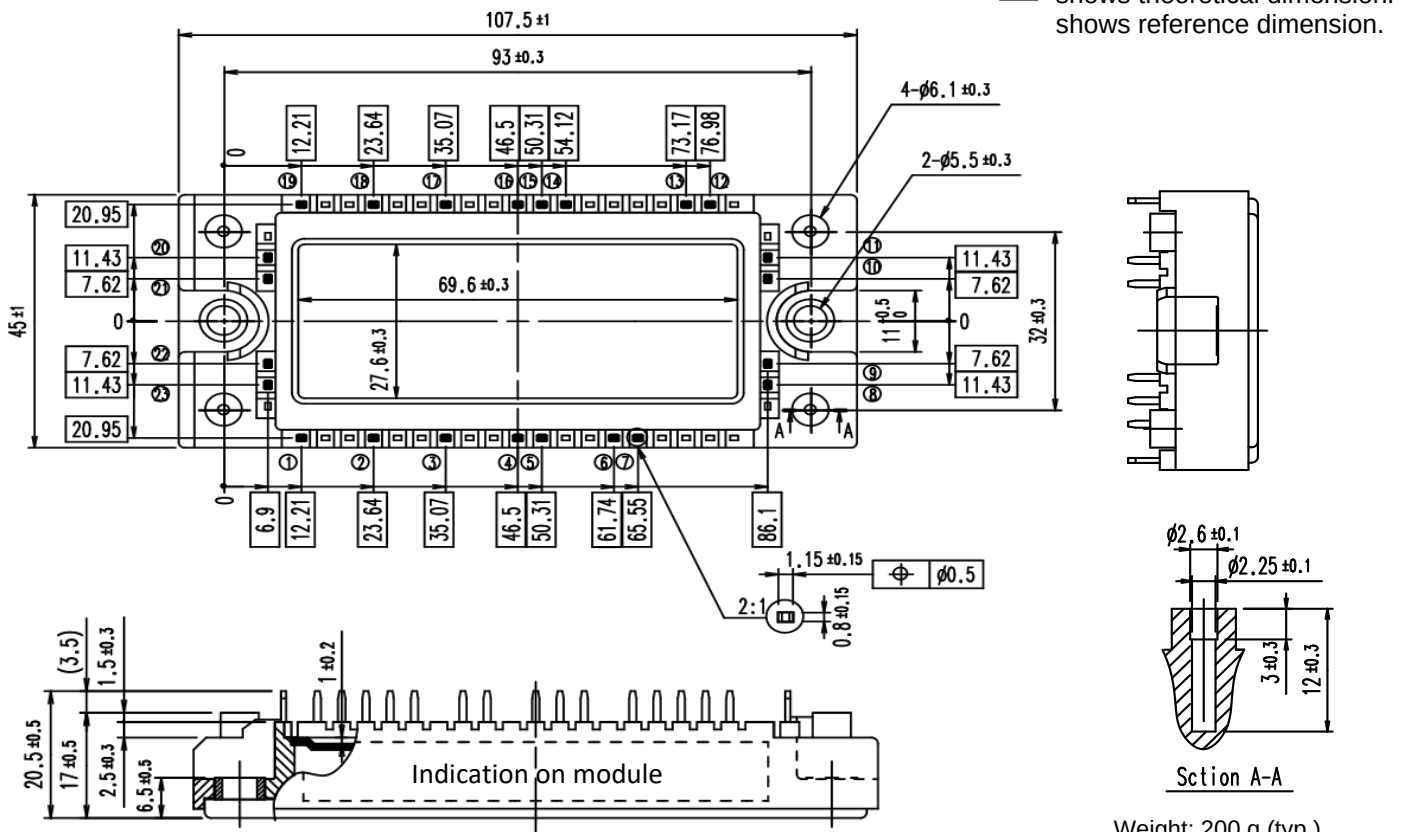

■ Equivalent circuit

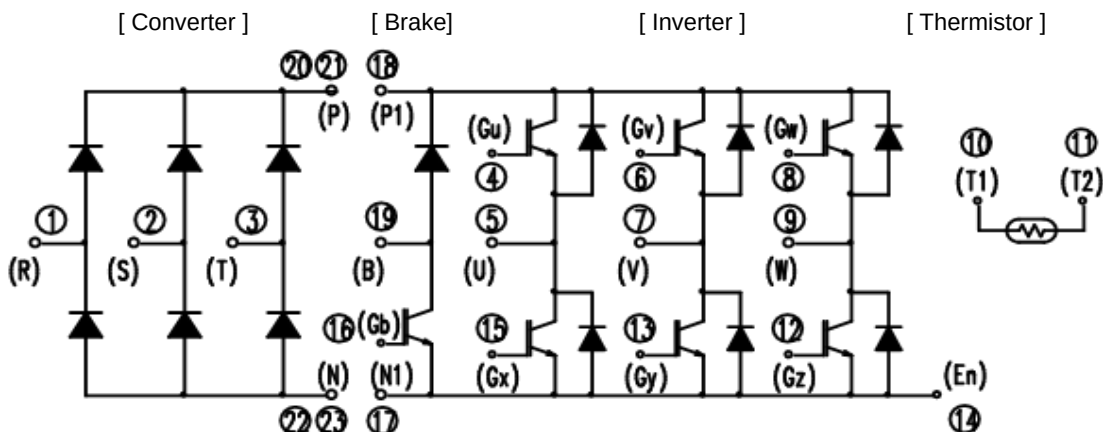

7MBR50XMA120-50

IGBT Modules
■ Maximum ratings (at $T_c = 25^\circ\text{C}$ unless otherwise specified)

Items			Symbols	Conditions		Maximum ratings	Units
Inverter	Collector-Emitter voltage		V_{CES}			1200	V
	Gate-Emitter voltage		V_{GES}			±20	V
	Collector current		I_C	Continuous	$T_c=100^{\circ}\text{C}$	50	A
			I_C pulse	1ms		100	
	Forward current		I_F	Continuous		50	
			I_F pulse	1ms		100	
Collector power dissipation		P_C	1 device		250	W	
Brake IGBT	Collector-Emitter voltage		V_{CES}			1200	V
	Gate-Emitter voltage		V_{GES}			±20	V
	Collector current		I_C	Continuous	$T_c=100^{\circ}\text{C}$	35	A
			I_C pulse	1ms		70	
	Collector power dissipation		P_C	1 device		200	W
Brake FWD	Forward current		I_F	Continuous		15	A
			I_{FRM}	1ms		30	
	Repetitive peak reverse voltage		V_{RRM}			1200	V
Converter	Repetitive peak reverse voltage		V_{RRM}			1600	V
	Average output current		I_O	Three-phase full wave rectified current	$T_c=80^{\circ}\text{C}$	50	A
	Surge current (Non-Repetitive) (*1)		I_{FSM}	$t=10\text{ms}$, Half sine wave form	$T_{vj}=25^{\circ}\text{C}$	630	A
					$T_{vj}=150^{\circ}\text{C}$	520	
	I^2t (Non-Repetitive) (*1)		I^2t		$T_{vj}=25^{\circ}\text{C}$	2000	A^2s
				$T_{vj}=150^{\circ}\text{C}$	1350		
Junction temperature			T_{vj}	Inverter, Brake		175	$^{\circ}\text{C}$
				Converter		150	
Operating junction temperature (under switching conditions)			T_{vjop}	Inverter, Brake		175	
				Converter		150	
Case temperature			T_c			125	
Storage temperature			T_{stg}			-40 ~ 125	
Isolation voltage	between terminals and copper base (*2)		V_{iso}	A.C. : 1min.		2500	Vrms
	between thermistor and others (*3)						
Screw torque (*4)	Mounting		-	M5		6.0	N·m

 (*1) T_{vj} : Temperature at test start.

(*2) All terminals should be connected together during the test.

(*3) Two thermistor terminals should be connected together, other terminals should be connected together and shorted to base plate during the test.

(*4) Recommendable value : Mounting 2.5 ~ 6.0 N·m (M5)

7MBR50XMA120-50

IGBT Modules
■ Electrical characteristics (at $T_{vj} = 25^{\circ}\text{C}$ unless otherwise specified)

Items		Symbols	Conditions		Characteristics			Units
					min.	typ.	max.	
Inverter	Zero Gate voltage collector current	I_{CES}	$V_{\text{GE}} = 0\text{V}$ $V_{\text{CE}} = 1200\text{V}$		-	-	50	μA
	Gate-Emitter leakage current	I_{GES}	$V_{\text{CE}} = 0\text{V}$ $V_{\text{GE}} = +20/-20\text{V}$		-	-	100	nA
	Gate-Emitter threshold voltage	$V_{\text{GE(th)}}$	$V_{\text{CE}} = 20\text{V}$ $I_{\text{C}} = 50\text{mA}$		6.0	6.5	7.0	V
	Collector-Emitter saturation voltage	$V_{\text{CE(sat)}}$ (terminal)	$I_{\text{C}} = 50\text{A}$	$T_{\text{vj}}=25^{\circ}\text{C}$	-	1.70	2.15	V
		$V_{\text{CE(sat)}}$ (chip)		$T_{\text{vj}}=25^{\circ}\text{C}$	-	1.50	1.95	
				$T_{\text{vj}}=125^{\circ}\text{C}$	-	1.85	-	
				$T_{\text{vj}}=150^{\circ}\text{C}$	-	1.95	-	
				$T_{\text{vj}}=175^{\circ}\text{C}$	-	2.00	-	
	Internal Gate resistance	r_{g}	-		-	0	-	Ω
	Capacitance	C_{ies}	$V_{\text{CE}} = 10\text{V}, V_{\text{GE}}=0\text{V}, f = 1\text{MHz}$		-	5.3	-	nF
		C_{oes}			-	0.18	-	
		C_{res}			-	0.05	-	
	Gate charge	Q_{G}	$V_{\text{CC}} = 600\text{V}$ $V_{\text{GE}}=-15 \rightarrow +15\text{V}$ $I_{\text{C}} = 50\text{A}$		-	340	-	nC
	Forward voltage	V_{F} (terminal)	$I_{\text{F}} = 50\text{A}$	$T_{\text{vj}}=25^{\circ}\text{C}$	-	2.00	2.45	V
		V_{F} (chip)		$T_{\text{vj}}=25^{\circ}\text{C}$	-	1.80	2.25	
				$T_{\text{vj}}=125^{\circ}\text{C}$	-	1.85	-	
				$T_{\text{vj}}=150^{\circ}\text{C}$	-	1.80	-	
$T_{\text{vj}}=175^{\circ}\text{C}$				-	1.75	-		
Switching time (*1)	$t_{\text{d(on)}}$	$V_{\text{CC}} = 600\text{V}$ $I_{\text{C}}, I_{\text{F}} = 50\text{A}$ $L_{\text{s}} = 30\text{nH}$ $V_{\text{GE}} = +15/-15\text{ V}$ $R_{\text{G}} = 18\ \Omega$	$T_{\text{vj}}=25^{\circ}\text{C}$	-	0.09	-	μs	
			$T_{\text{vj}}=125^{\circ}\text{C}$	-	0.09	-		
			$T_{\text{vj}}=150^{\circ}\text{C}$	-	0.09	-		
			$T_{\text{vj}}=175^{\circ}\text{C}$	-	0.10	-		
	t_{r}	$V_{\text{CC}} = 600\text{V}$ $I_{\text{C}}, I_{\text{F}} = 50\text{A}$ $L_{\text{s}} = 30\text{nH}$ $V_{\text{GE}} = +15/-15\text{ V}$ $R_{\text{G}} = 18\ \Omega$	$T_{\text{vj}}=25^{\circ}\text{C}$	-	0.04	-		
			$T_{\text{vj}}=125^{\circ}\text{C}$	-	0.04	-		
			$T_{\text{vj}}=150^{\circ}\text{C}$	-	0.04	-		
			$T_{\text{vj}}=175^{\circ}\text{C}$	-	0.04	-		
	$t_{\text{d(off)}}$	$V_{\text{CC}} = 600\text{V}$ $I_{\text{C}}, I_{\text{F}} = 50\text{A}$ $L_{\text{s}} = 30\text{nH}$ $V_{\text{GE}} = +15/-15\text{ V}$ $R_{\text{G}} = 18\ \Omega$	$T_{\text{vj}}=25^{\circ}\text{C}$	-	0.24	-		
			$T_{\text{vj}}=125^{\circ}\text{C}$	-	0.27	-		
			$T_{\text{vj}}=150^{\circ}\text{C}$	-	0.27	-		
			$T_{\text{vj}}=175^{\circ}\text{C}$	-	0.28	-		
	t_{f}	$V_{\text{CC}} = 600\text{V}$ $I_{\text{C}}, I_{\text{F}} = 50\text{A}$ $L_{\text{s}} = 30\text{nH}$ $V_{\text{GE}} = +15/-15\text{ V}$ $R_{\text{G}} = 18\ \Omega$	$T_{\text{vj}}=25^{\circ}\text{C}$	-	0.11	-		
			$T_{\text{vj}}=125^{\circ}\text{C}$	-	0.17	-		
			$T_{\text{vj}}=150^{\circ}\text{C}$	-	0.20	-		
			$T_{\text{vj}}=175^{\circ}\text{C}$	-	0.21	-		
Reverse recovery time	t_{rr}	$V_{\text{CC}} = 600\text{V}$ $I_{\text{C}}, I_{\text{F}} = 50\text{A}$ $L_{\text{s}} = 30\text{nH}$ $V_{\text{GE}} = +15/-15\text{ V}$ $R_{\text{G}} = 18\ \Omega$	$T_{\text{vj}}=25^{\circ}\text{C}$	-	0.08	-		
			$T_{\text{vj}}=125^{\circ}\text{C}$	-	0.14	-		
			$T_{\text{vj}}=150^{\circ}\text{C}$	-	0.17	-		
			$T_{\text{vj}}=175^{\circ}\text{C}$	-	0.19	-		

(*1) Turn on time (t_{on}) = $t_{d(on)} + t_r$, Turn off time (t_{off}) = $t_{d(off)} + t_f$

7MBR50XMA120-50

IGBT Modules

Items		Symbols	Conditions		Characteristics			Units
					min.	typ.	max.	
Inverter	Switching loss (per pulse)	E_{on}	$V_{CC} = 600V$	$T_{vj}=25^{\circ}C$	-	3.78	-	mJ
			$I_C, I_F = 50A \quad L_s = 30nH$	$T_{vj}=125^{\circ}C$	-	4.90	-	
			$V_{GE} = +15/-15 V$	$T_{vj}=150^{\circ}C$	-	5.46	-	
			$R_G = 18 \Omega$	$T_{vj}=175^{\circ}C$	-	5.83	-	
		E_{off}	$V_{CC} = 600V$	$T_{vj}=25^{\circ}C$	-	3.36	-	
			$I_C, I_F = 50A \quad L_s = 30nH$	$T_{vj}=125^{\circ}C$	-	4.31	-	
			$V_{GE} = +15/-15 V$	$T_{vj}=150^{\circ}C$	-	4.62	-	
			$R_G = 18 \Omega$	$T_{vj}=175^{\circ}C$	-	4.96	-	
		E_{rr}	$V_{CC} = 600V$	$T_{vj}=25^{\circ}C$	-	1.43	-	
			$I_C, I_F = 50A \quad L_s = 30nH$	$T_{vj}=125^{\circ}C$	-	2.52	-	
			$V_{GE} = +15/-15 V$	$T_{vj}=150^{\circ}C$	-	3.27	-	
			$R_G = 18 \Omega$	$T_{vj}=175^{\circ}C$	-	3.72	-	
Zero Gate voltage collector current		I_{CES}	$V_{GE} = 0V$ $V_{CE} = 1200V$		-	-	50	μA
Gate-Emitter leakage current		I_{GES}	$V_{CE} = 0V, \quad V_{GE} = +20/-20V$		-	-	100	nA
Collector-Emitter saturation voltage	$V_{CE(sat)}$ (terminal)	$V_{GE} = 15V$ $I_C = 35A$	$T_{vj}=25^{\circ}C$	-	1.65	2.10	V	
			$T_{vj}=25^{\circ}C$	-	1.50	1.95		
	$V_{CE(sat)}$ (chip)		$T_{vj}=125^{\circ}C$	-	1.85	-		
			$T_{vj}=150^{\circ}C$	-	1.95	-		
			$T_{vj}=175^{\circ}C$	-	2.00	-		
Internal Gate resistance		r_g	-		-	0	-	Ω
Brake	Switching time (*1)	$t_{d(on)}$	$V_{CC} = 600V$	$T_{vj}=25^{\circ}C$	-	0.10	-	μs
			$I_C = 35A \quad L_s = 30nH$	$T_{vj}=125^{\circ}C$	-	0.10	-	
			$V_{GE} = +15/-15 V$	$T_{vj}=150^{\circ}C$	-	0.11	-	
			$R_G = 30 \Omega$	$T_{vj}=175^{\circ}C$	-	0.11	-	
		t_r	$V_{CC} = 600V$	$T_{vj}=25^{\circ}C$	-	0.04	-	
			$I_C = 35A \quad L_s = 30nH$	$T_{vj}=125^{\circ}C$	-	0.05	-	
			$V_{GE} = +15/-15 V$	$T_{vj}=150^{\circ}C$	-	0.05	-	
			$R_G = 30 \Omega$	$T_{vj}=175^{\circ}C$	-	0.05	-	
		$t_{d(off)}$	$V_{CC} = 600V$	$T_{vj}=25^{\circ}C$	-	0.23	-	
			$I_C = 35A \quad L_s = 30nH$	$T_{vj}=125^{\circ}C$	-	0.27	-	
			$V_{GE} = +15/-15 V$	$T_{vj}=150^{\circ}C$	-	0.27	-	
			$R_G = 30 \Omega$	$T_{vj}=175^{\circ}C$	-	0.27	-	
		t_f	$V_{CC} = 600V$	$T_{vj}=25^{\circ}C$	-	0.12	-	
			$I_C = 35A \quad L_s = 30nH$	$T_{vj}=125^{\circ}C$	-	0.18	-	
			$V_{GE} = +15/-15 V$	$T_{vj}=150^{\circ}C$	-	0.20	-	
			$R_G = 30 \Omega$	$T_{vj}=175^{\circ}C$	-	0.21	-	
Reverse current		I_{RRM}	$V_R = 1200V$		-	-	50	μA
Forward voltage	V_F (terminal)	$I_F = 15A$	$T_{vj}=25^{\circ}C$	-	1.95	2.40	V	
	V_F (chip)	$I_F = 15A$	$T_{vj}=25^{\circ}C$	-	1.80	2.25		
		$T_{vj}=125^{\circ}C$	-	1.85	-			
		$T_{vj}=150^{\circ}C$	-	1.80	-			
		$T_{vj}=175^{\circ}C$	-	1.75	-			
Converter	Reverse current	I_{RRM}	$V_R = 1600V$		-	-	50	μA
Forward voltage	V_{FM}	$I_F = 50A$	terminal	-	1.25	1.70	V	
			chip	-	1.05	1.50		
Thermistor	Resistance	R	$T = 25^{\circ}C$		-	5000	-	Ω
			$T = 100^{\circ}C$		465	495	520	
B value		B	$T = 25/ 50^{\circ}C$		3305	3375	3450	K

(*1) Turn on time (t_{on}) = $t_{d(on)} + t_r$, Turn off time (t_{off}) = $t_{d(off)} + t_f$
FM6M01711

7MBR50XMA120-50

IGBT Modules
NOTICE:

The external gate resistance (R_G) shown above is one of our recommended value for the purpose of minimum switching loss. However the optimum R_G depends on circuit configuration and/or environment. We recommend that the R_G has to be carefully chosen based on consideration if IGBT module matches design criteria, for example, switching loss, EMC/EMI, spike voltage, surge current and no unexpected oscillation and so on.

■ Thermal resistance characteristics

Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	max.	
Thermal resistance (1device)	$R_{th(j-c)}$	Inverter IGBT	-	-	0.59	°C/W
		Inverter FWD	-	-	0.71	
		Brake IGBT	-	-	0.74	
		Brake FWD	-	-	1.85	
		Converter Diode	-	-	0.72	
Contact thermal resistance (1 IGBT+1 FWD) (*1)	$R_{th(c-f)}$	with 1 W/(m·K) thermal grease	-	0.05	-	


(*1) This is the value which is defined mounting on the additional cooling fin with thermal grease.

7MBR50XMA120-50

IGBT Modules


[Inverter]

Collector current vs. Collector-Emmitter voltage (typ.)
 $T_{vj} = 25^{\circ}\text{C} / \text{chip}$

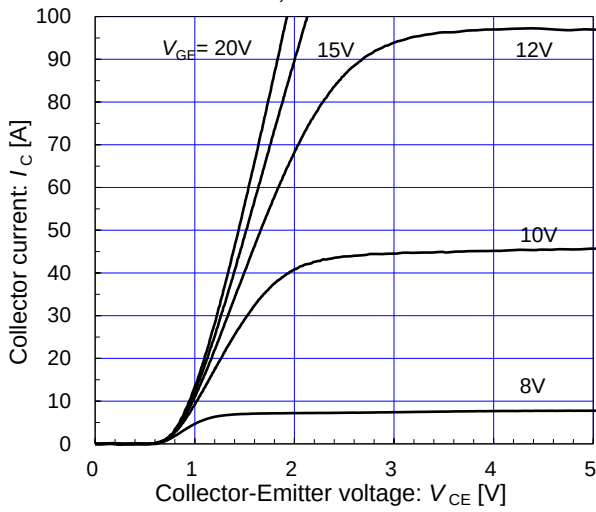


[Inverter]

Collector current vs. Collector-Emmitter voltage (typ.)
 $T_{vj} = 175^{\circ}\text{C} / \text{chip}$

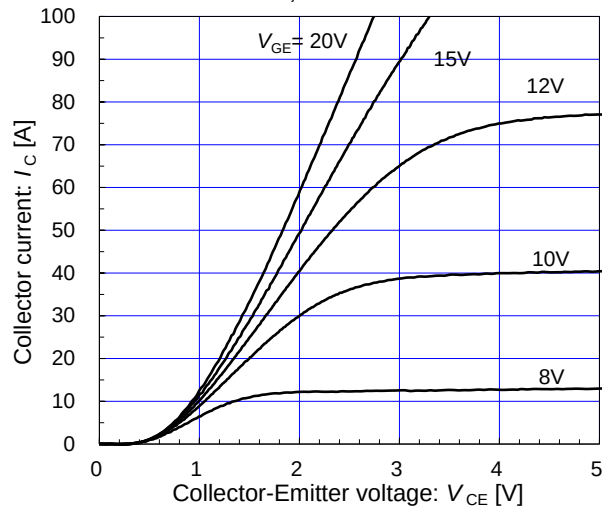


[Inverter]

Collector current vs. Collector-Emmitter voltage (typ.)
 $V_{GE} = 15\text{V} / \text{chip}$

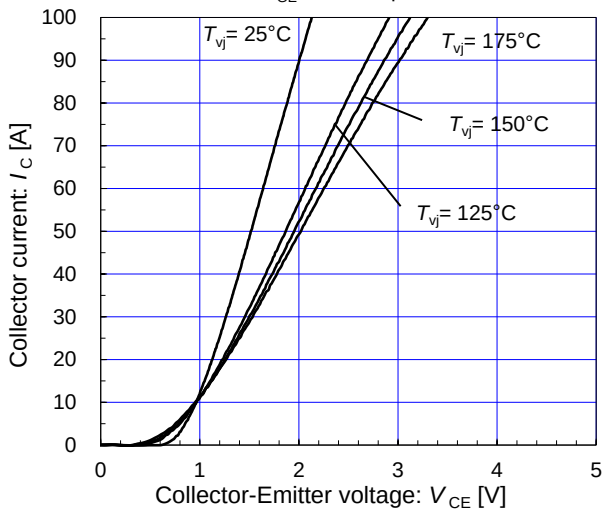


[Inverter]

Collector-Emmitter voltage vs. Gate-Emmitter voltage (typ.)
 $T_{vj} = 25^{\circ}\text{C} / \text{chip}$

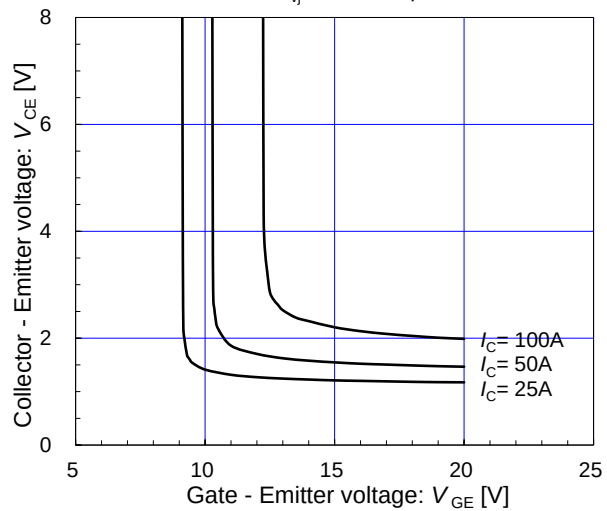


[Inverter]

Capacitance vs. Collector-Emmitter voltage (typ.)
 $V_{GE} = 0\text{V}, f = 1\text{MHz}, T_{vj} = 25^{\circ}\text{C}$

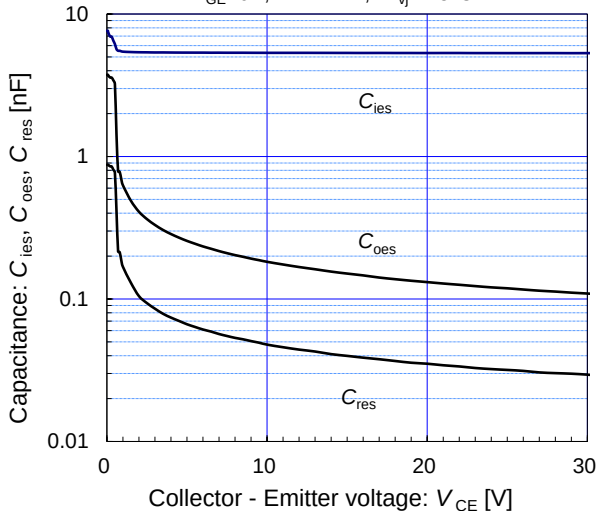







[Inverter]

Dynamic Gate charge (typ.)
 $V_{CC} = 600\text{V}, I_c = 50\text{A}, T_{vj} = 25^{\circ}\text{C}$

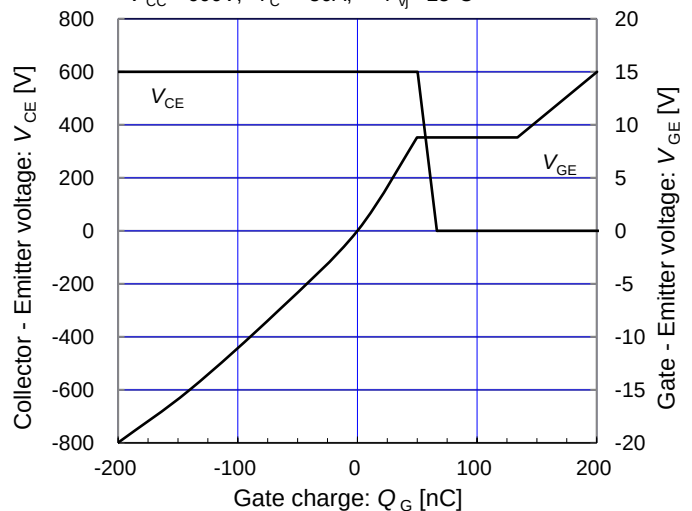

7MBR50XMA120-50

IGBT Modules

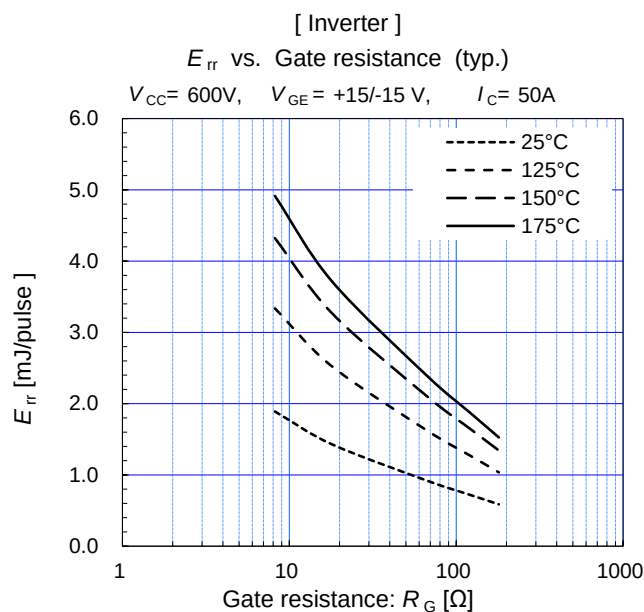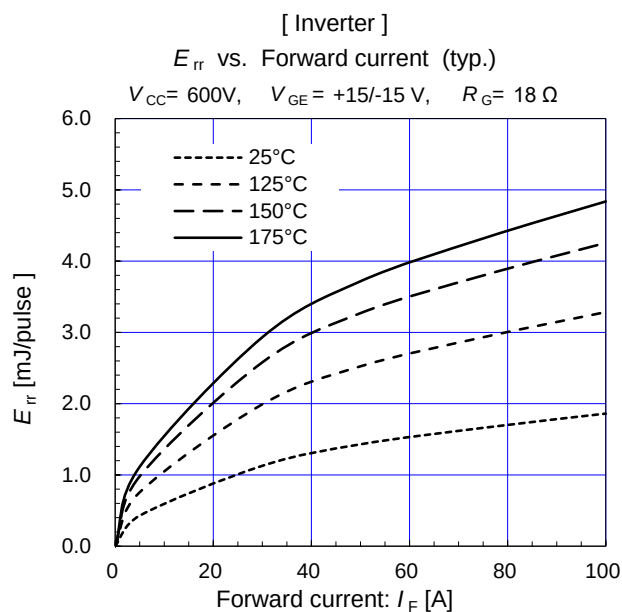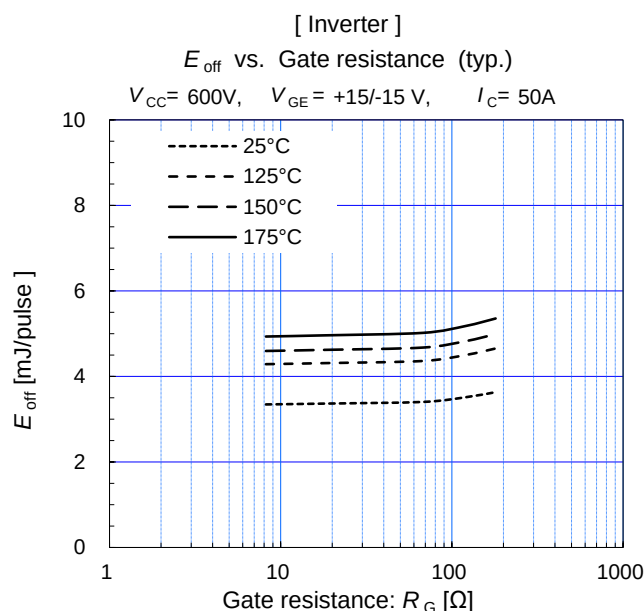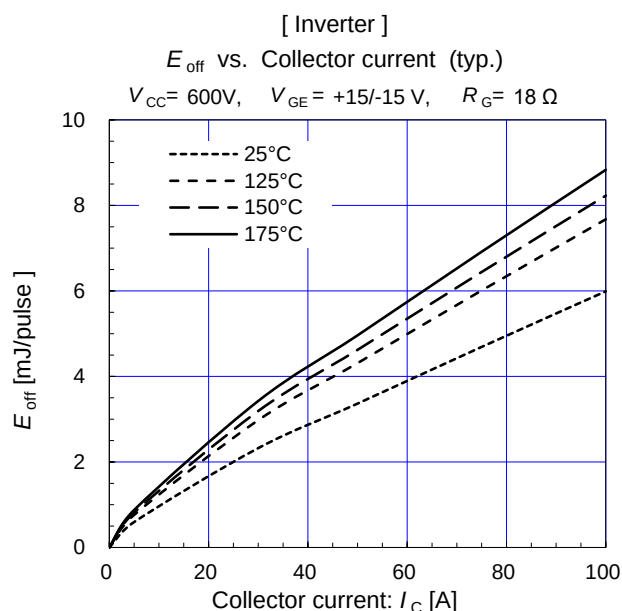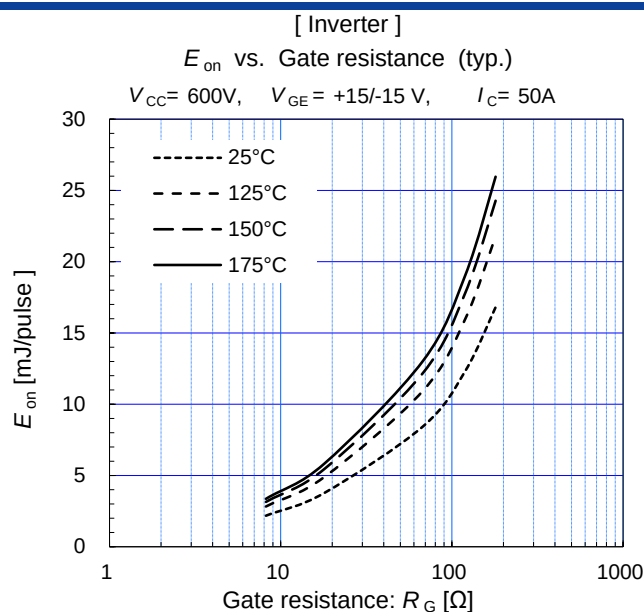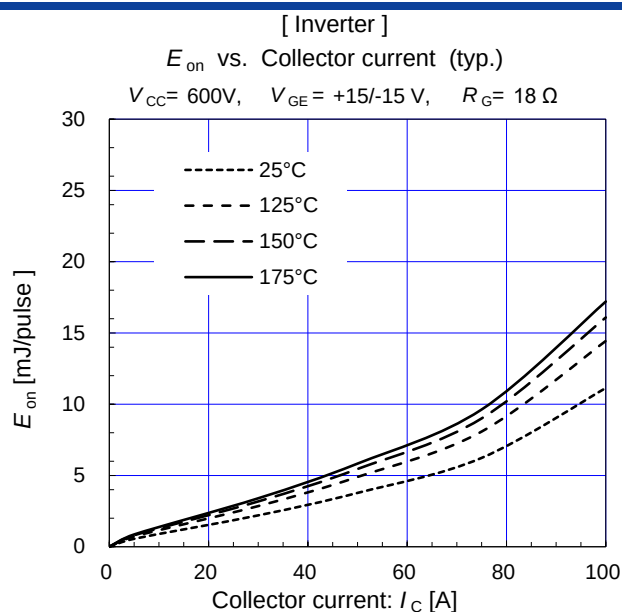


7MBR50XMA120-50

IGBT Modules

[Inverter]

Switching time vs. Collector current (typ.)


$V_{CC}=600V$, $R_G=18\Omega$ $V_{GE}=+15/-15V$, $T_{vj}=25^\circ C$

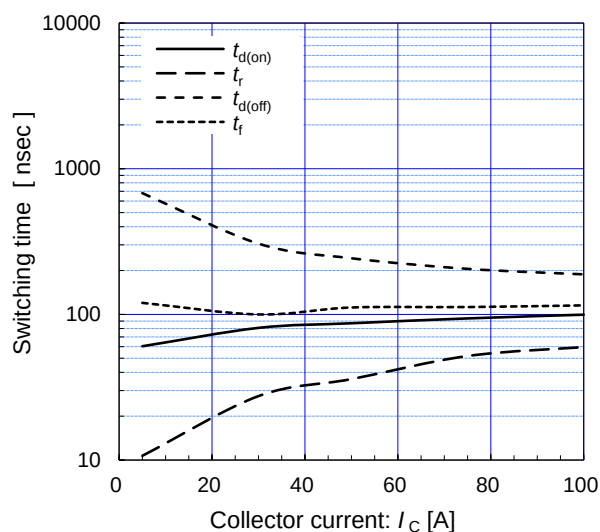

[Inverter]

Switching time vs. Gate resistance (typ.)


$V_{CC}=600V$, $I_C=50A$, $V_{GE}=+15/-15V$, $T_{vj}=25^\circ C$

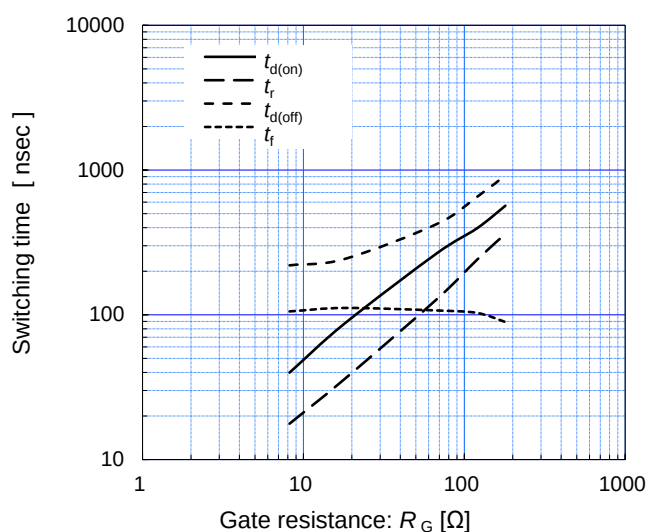

[Inverter]

Switching time vs. Collector current (typ.)


$V_{CC}=600V$, $R_G=18\Omega$ $V_{GE}=+15/-15V$, $T_{vj}=175^\circ C$

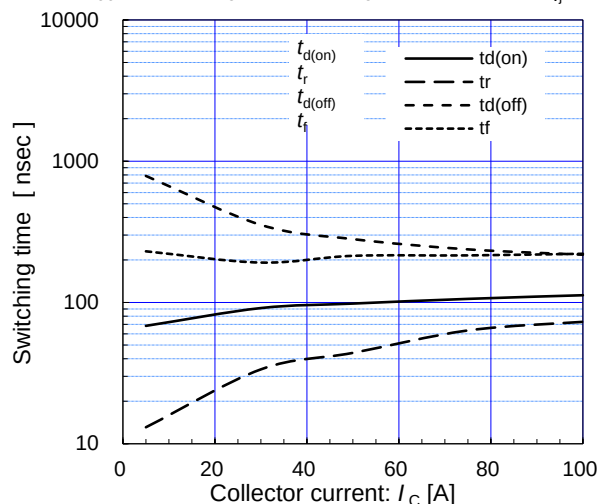

[Inverter]

Switching time vs. Gate resistance (typ.)


$V_{CC}=600V$, $I_C=50A$, $V_{GE}=+15/-15V$, $T_{vj}=175^\circ C$

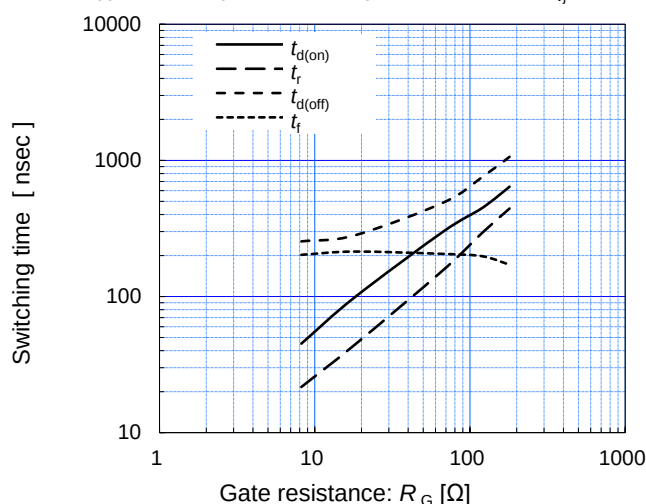

[Inverter]

Reverse bias safe operating area (max.)

$V_{GE}=+15/-15V$, $R_G \geq 18\Omega$ $T_{vj}=175^\circ C$

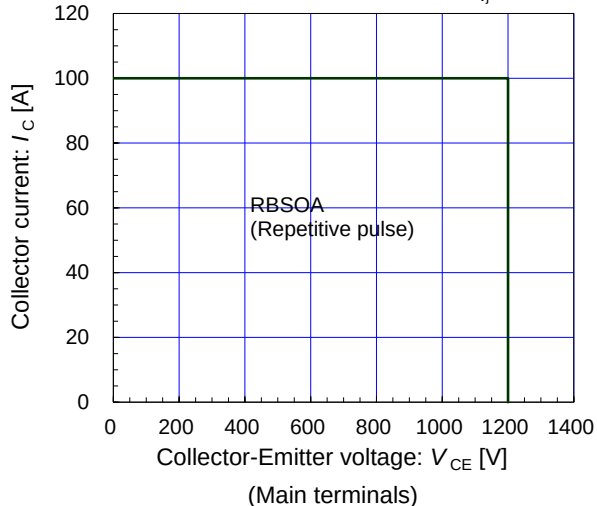


7MBR50XMA120-50

IGBT Modules

[Inverter]


Forward current vs. Forward voltage (typ.)
chip

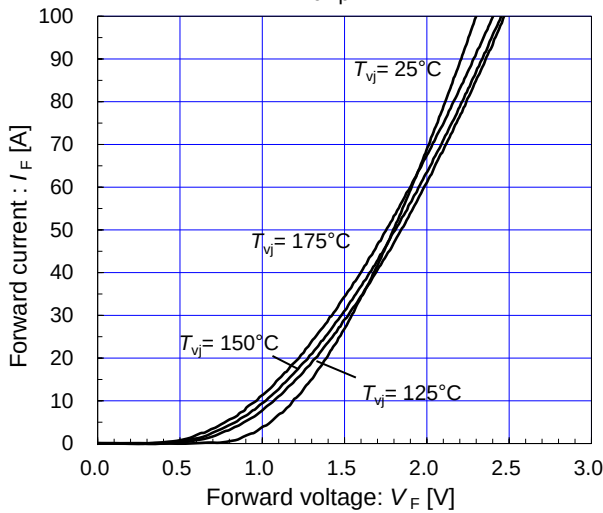

[Inverter]

Reverse recovery characteristics (typ.)


$V_{CC} = 600V$, $V_{GE} = +15/-15V$, $R_G = 18\Omega$

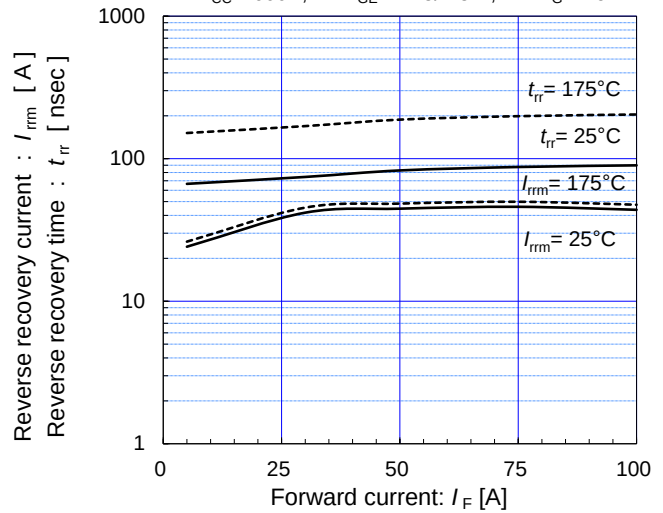


[Converter]

Forward current vs. Forward voltage (typ.)

chip

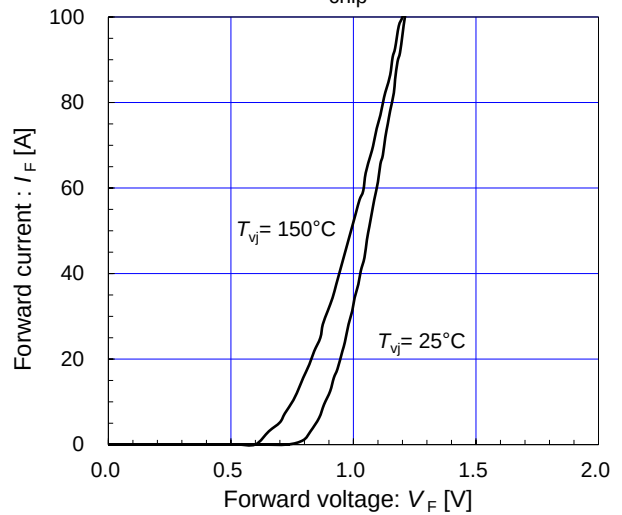


Transient thermal resistance (max.)

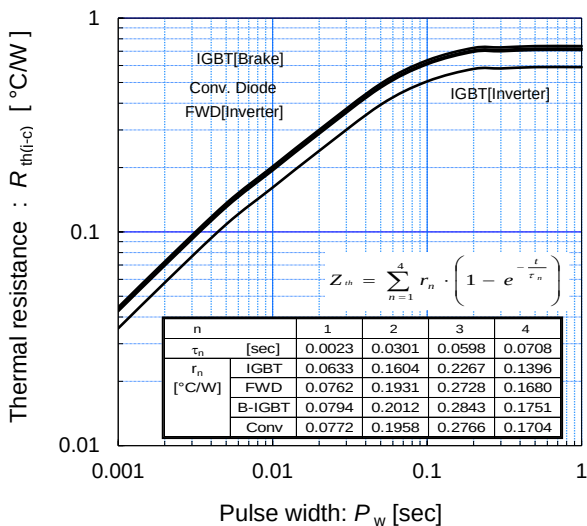

[Thermistor]

Temperature characteristic (typ.)

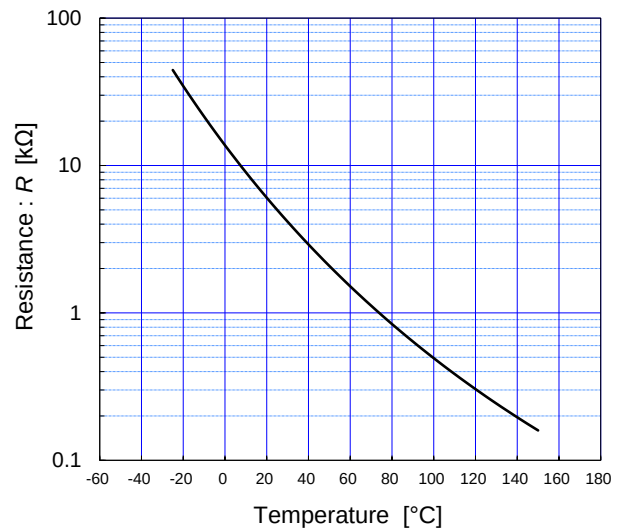

FM6M01711

2021/10


7MBR50XMA120-50

IGBT Modules

[Brake]

Collector current vs. Collector-Emitter voltage (typ.)


$T_{vj} = 25^\circ\text{C} / \text{chip}$

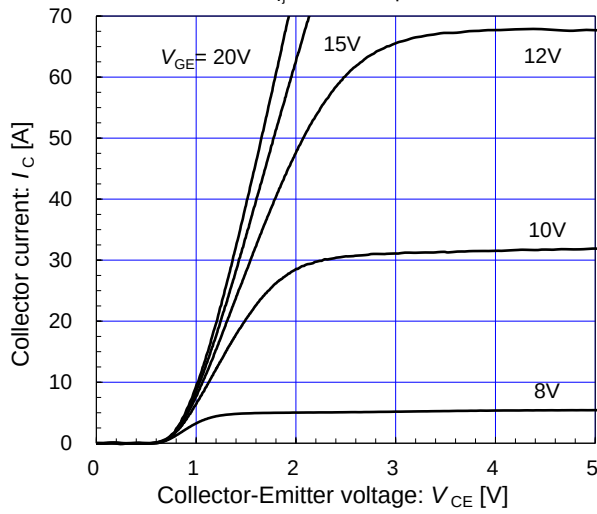

[Brake]

Collector current vs. Collector-Emitter voltage (typ.)


$T_{vj} = 175^\circ\text{C} / \text{chip}$

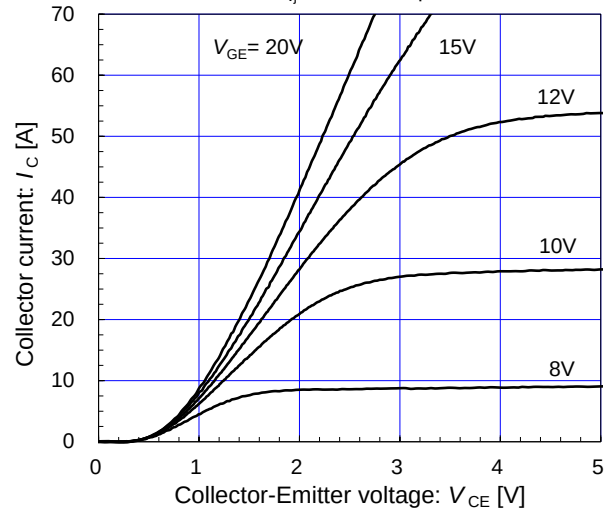

[Brake]

Collector current vs. Collector-Emitter voltage (typ.)


$V_{GE} = 15\text{V} / \text{chip}$

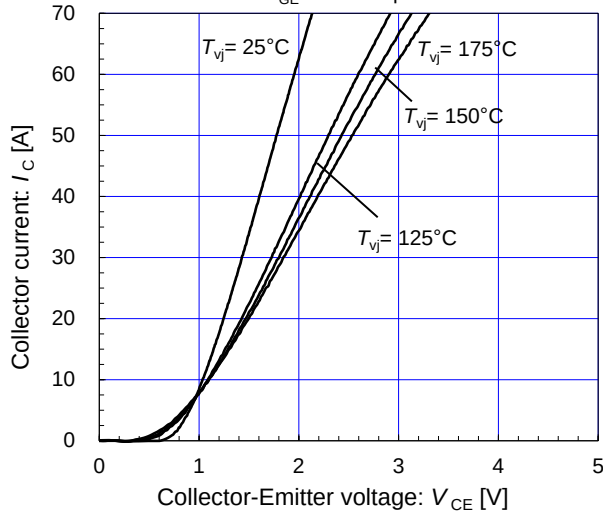

[Brake]

Collector-Emitter voltage vs. Gate-Emitter voltage (typ.)


$T_{vj} = 25^\circ\text{C} / \text{chip}$

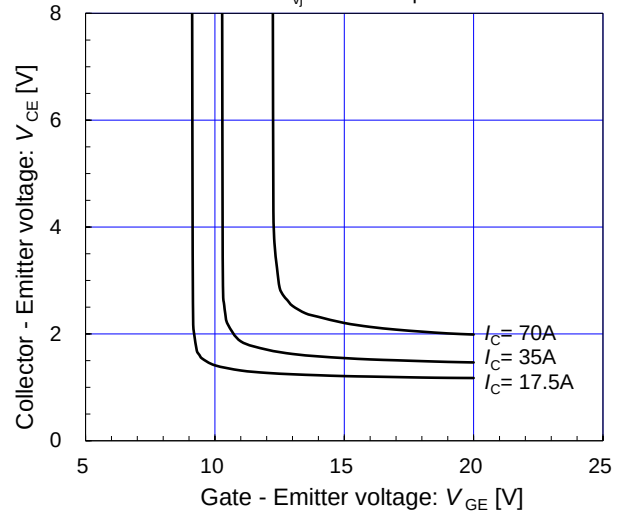

[Brake]

Capacitance vs. Collector-Emitter voltage (typ.)


$V_{GE} = 0\text{V}, f = 1\text{MHz}, T_{vj} = 25^\circ\text{C}$

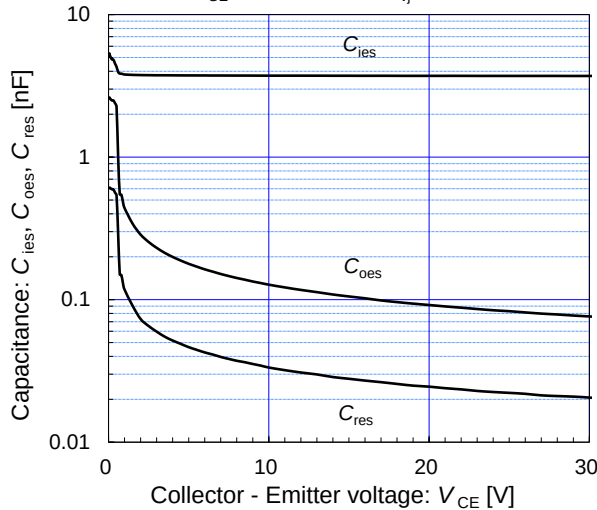

[Brake]

Dynamic Gate charge (typ.)

$V_{CC} = 600\text{V}, I_c = 35\text{A}, T_{vj} = 25^\circ\text{C}$

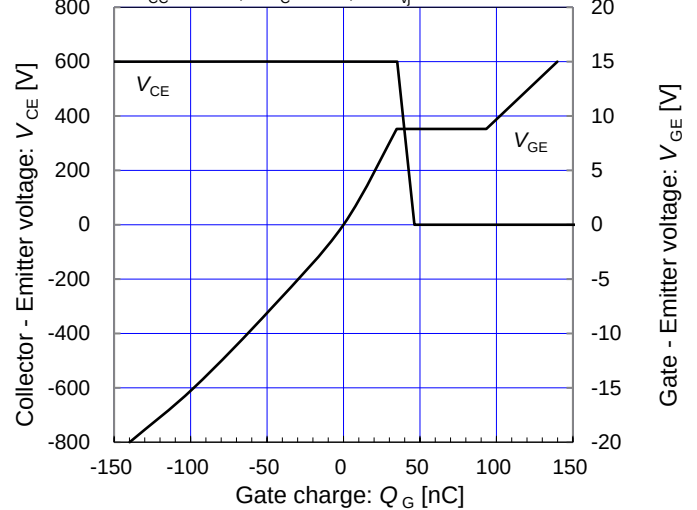

Warnings

1. This Catalog contains the product specifications, characteristics, data, materials, and structures as of 10/2021. The contents are subject to change without notice for specification changes or other reasons. When using a product listed in this Catalog, be sure to obtain the latest specifications.
2. All applications described in this Catalog exemplify the use of Fuji's products for your reference only. No right or license, either express or implied, under any patent, copyright, trade secret or other intellectual property right owned by Fuji Electric Co., Ltd. is (or shall be deemed) granted. Fuji Electric Co., Ltd. makes no representation or warranty, whether express or implied, relating to the infringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.
3. Although Fuji Electric Co., Ltd. is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design fail-safe, flame retardant, and free of malfunction.
4. The products introduced in this Catalog are intended for use in the following electronic and electrical equipment which has normal reliability requirements.
 ·Computers ·OA equipment ·Communications equipment (terminal devices) ·Measurement equipment
 ·Machine tools ·Audiovisual equipment ·Electrical home appliances ·Personal equipment ·Industrial robots etc.
5. If you need to use a product in this Catalog for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric Co., Ltd. to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.
 ·Transportation equipment (mounted on cars and ships) ·Trunk communications equipment
 ·Traffic-signal control equipment ·Gas leakage detectors with an auto-shut-off feature
 ·Emergency equipment for responding to disasters and anti-burglary devices ·Safety devices ·Medical equipment
6. Do not use products in this Catalog for the equipment requiring strict reliability such as the following and equivalents to strategic equipment (without limitation).
 ·Space equipment ·Aeronautic equipment ·Nuclear control equipment ·Submarine repeater equipment
7. Copyright (c)1996-2021 by Fuji Electric Co., Ltd. All rights reserved.
 No part of this Catalog may be reproduced in any form or by any means without the express permission of Fuji Electric Co., Ltd.
8. If you have any question about any portion in this Catalog, ask Fuji Electric Co., Ltd. or its sales agents before using the product. Neither Fuji Electric Co., Ltd. nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.